

Key Features & Benefits

- IP20 rated
- Provides Ideal lighting for Retail, Manufacturing and Warehousing
- Multiple mounting methods available
- Up to 155lm/w+ efficiency
- Fit & Forget 5 Year Warranty
- Reduces energy consumption by over 50% on traditional lighting
- Multiple Beam Angles Available - 30° x 100° / 60° x 120° / 80° x 100° / Double 60° / Single 30°

CEMALighting
For all your lighting needs

FIT & FORGET 5 YEAR WARRANTY

IP 20

WT -20° to 45°

CT 3000K

CT 4000K

CT 5000K

ORDER

LED Linkable Modular Lighting System







The CEMA Lighting LED IP20 Linkable Modular Lighting Systems provide a bright clear energy efficient light that is suitable for internal lighting of Retail, Manufacturing, Workshop and Warehousing applications, as well as many other instances when looking to install a unique and flexible lighting system.

This fitting also has different optical lenses available this allows us to choose which beam angle works best for the application or the area in which the light is being installed, this fitting comes with 5 optional lenses allowing for use in a wide range of applications, you can see the different outputs on the reverse of this page.

This fitting is also very light in comparison to similar types of LED Link Systems available, weighing just 2.2KG per fitting and with its 155LM/w output it also offers one of the highest available efficiencies for LED luminaires on the market. With up to 60,000 hour life span this provides a maintenance free solution for difficult applications where changing lamps or drivers can either be hazardous or expensive. This product comes with the CEMA Lighting **Five Year Fit & Forget Warranty.**

Applications


- Retail Stores
- Supermarkets
- Shopping Centres
- Aisles
- Preperation Areas
- Storage Areas
- Workshops


Optional Extras

- 1-10v Dimmable
- DALI Control
- Daylight Sensor
- PIR Sensor

Cema Lighting Ltd, Gallamore Lane Industrial Estate, Market Rasen, Lincolnshire, LN8 3HA
Tel: 01673 840000 Fax: 0845 505 0775 Email: sales@cemalighting.co.uk Website: www.cemalighting.co.uk

Photometric Curve Diagram

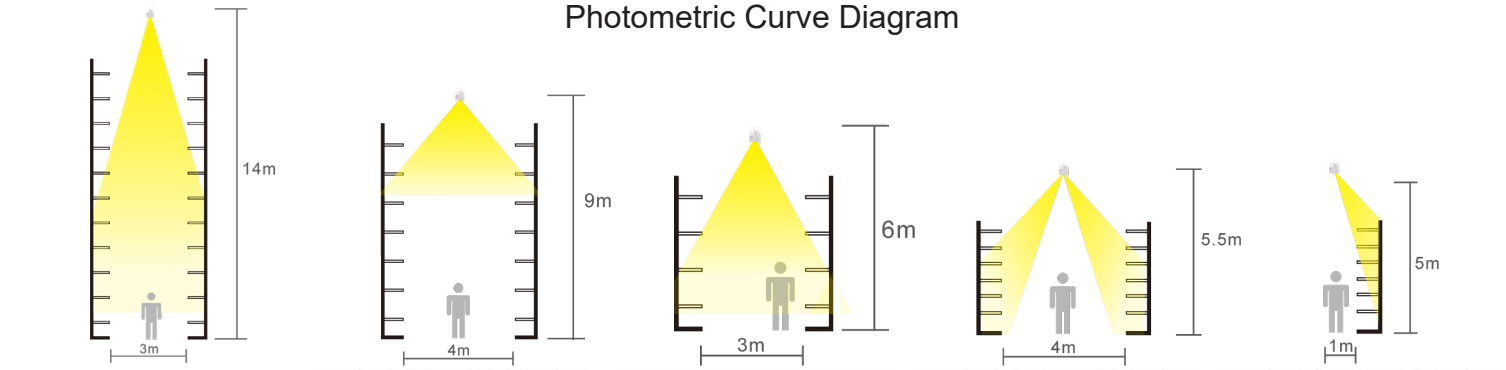

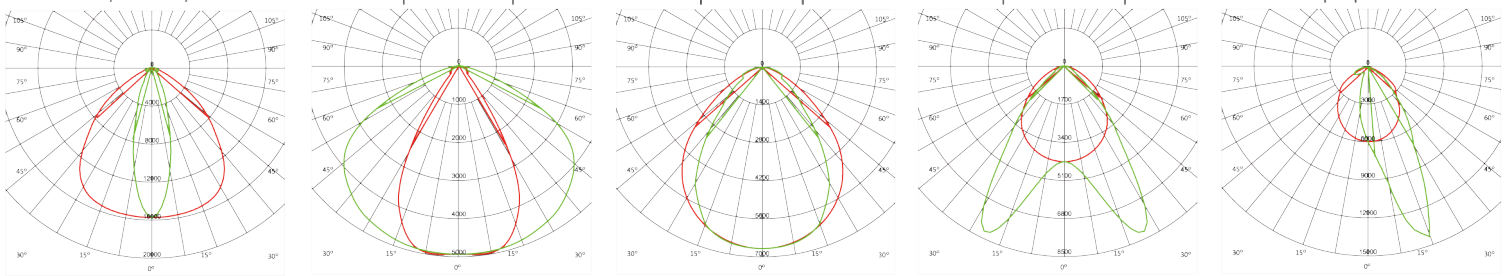


30° x 100° | 60° x 120° | 80° x 100° | Double 60° | Single 30°

LED Linkable Modular Lighting System

Technical Specification

Product Code	403-03-030-040	403-03-030-065	403-03-030-075
Wattage (W)	40W	65W	75W
IP Rating	IP20	IP20	IP20
Luminous Output	6,200	10,075	11,625
Lumens Per Watt	155±5%	155±5%	155±5%
Lifespan (up to)	60,000	60,000	60,000
Colour Temp	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
CRI	>70	>70	>70
Input Voltage	220-240V 50 / 60Hz	220-240V 50 / 60Hz	220-240V 50 / 60Hz
Working Temp	- 20°C to 45°C	- 20°C to 45°C	- 20°C to 45°C
Beam Angle	Various	Various	Various
Power Factor	≥0.90	≥0.90	≥0.90
Weight	2.2±0.3KG	2.2±0.3KG	2.2±0.3KG
Dimentions (mm)	1532*61*53	1532*61*53	1532*61*53

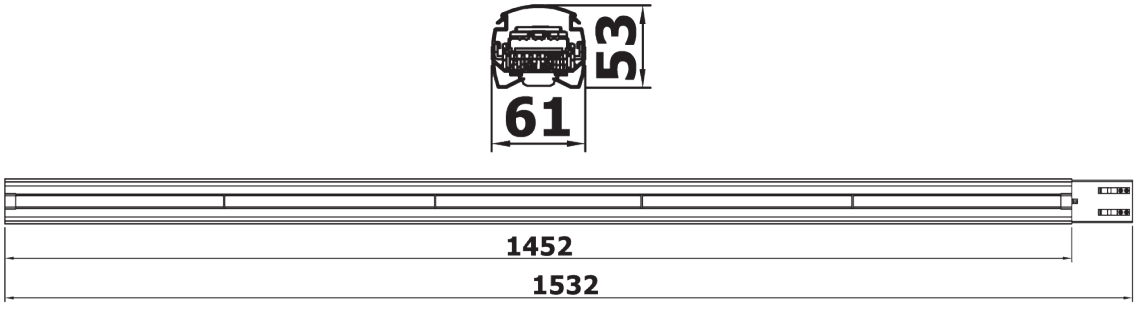

Size Diagram

Commercial and Industrial Lighting Specialists

CEMALighting
For all your lighting needs

RoHS CE Compliant

Cema Lighting Ltd, Gallamore Lane Industrial Estate, Market Rasen, Lincolnshire, LN8 3HA
Tel: 01673 840000 Fax: 0845 505 0775 Email: sales@cemalighting.co.uk Website: www.cemalighting.co.uk